
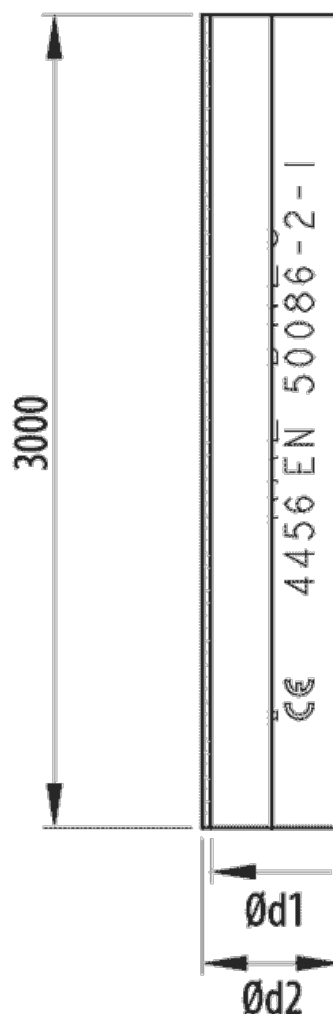


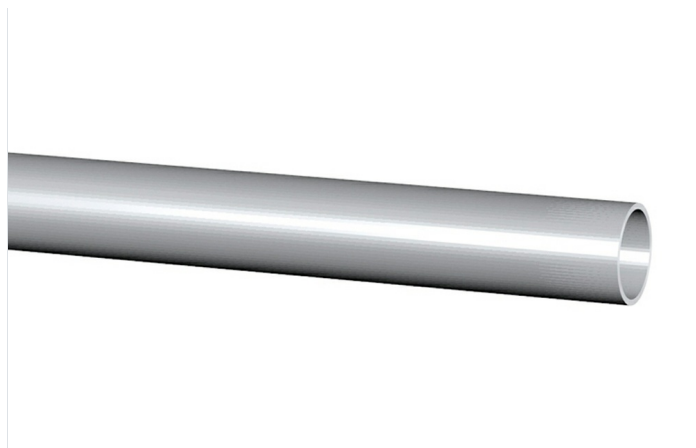

Description

Rigid push fit aluminium conduit for installations that require an excellent degree of resistance to corrosion and high mechanical performance. Lightweight and easy Installation. Optimal rigid conduit for surface installations in industrial plants. It is supplied in 3 metre lengths.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of aluminum, suitable for installations in industrial plants and aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Lightweight and easy to install.

Compression resistance: 1250 N. Impact Resistance: Grade 4.

Push fit type connection for joining conduits or accessories.

Applications

Its use is recommended in installations that require high mechanical performance and a high resistance to corrosion in tertiary and industrial applications with high safety requirements and premises with risk of fire or explosion. Also for outdoor installation and aggressive environments.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."





PHARMACEUTICAL INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC001173	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		AL	
Finish		ALU, Aluminium	
DN		NW40	
Ø d1 (mm)		37.6	
Ø d2 (mm)		40	
kg/u		0,352	
u		15	
Material		Aluminum	
Cod. IEC.61386		4456	
Compression strength (N)		1250 N	
Impact Strength (J)		6 J	
IP		IP44	
Working temperature range (°C)		-45 / 250 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

- Protection System
- CU

Pregalvanised

EZ

Electrogalvanised

BC

Electrogalvanised Bichromate

BK8

High Resistance Coating

GC

Hot Dip Galvanising

INOX

Stainless Steel

PT

Polyester Paint

AL

Aluminum

LN

Brass or Nickel-plated brass

- Insulating materials
- PC+ABS

Halogen Free Polycarbonate + ABS

PVC

Polyvinyl Chloride

PP

Halogen Free Polypropylene

PA6

Halogen Free Polyamide 6

PA12

Halogen Free Polyamide 12

PU

Polyurethane

PE

Polyethylene

NBR

NBR rubber

PET

Thermoplastic Polyester

TPV

Thermoplastic