


RAL Stand off Clamp

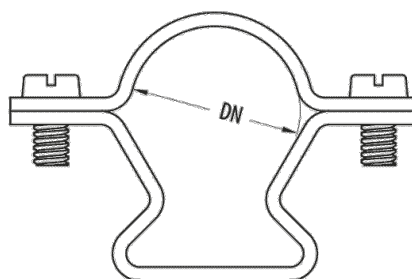

Description

Aluminum stand off clamp for fixing rigid metal conduits. Fixing with screws. Available in several diameters.

Advantages

It has a foot that allows the conduit to stand off from the floor or wall.

Available in various sizes: NW16, NW20, NW25, NW32 and NW40.

Working temperature: -45°C to + 250°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of aluminum, suitable for installations in industrial plants and aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

It is recommended for RAL aluminium conduits in installations that require high mechanical performance. With a high resistance to corrosion in applications of industrial plants, tertiary and industrial sector with high safety requirements. Premises with risk of fire or explosion. Installation outside and in aggressive environments.

Solutions



RAL Stand off Clamp

Main technical characteristics

AL	NW16, NW20, NW25, NW32, NW40	Aluminum	-45 / 250 °C
LIBRE DE HALÓGENOS, NO PROPAGADOR DE LA LLAMA	ETIM 10 EC000127		

Product data

DN	Ref	kg/u	
NW16	55031016	0,003	50
NW20	55031020	0,003	50
NW25	55031025	0,003	50
NW32	55031032	0,021	25
NW40	55031040	0,022	25

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

