


RINOX Stand off Clamp

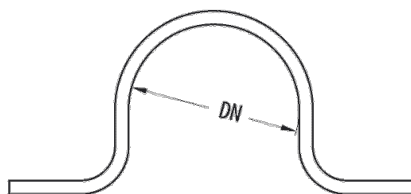

Description

Stand off clamp in AISI 304 stainless steel for fixing rigid metal conduits. Fixing with screws. Available in several diameters.

Advantages

Accessory for mounting RINOX pipes. It has a foot that allows to separate the tube from the floor or wall.

Suitable for aesthetic applications.

Working temperature: -45°C to + 250°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in stainless steel AISI 303, 304, (standard EN 10088), with Thermicron passivation treatment, suitable for installations in aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

It is recommended for RINOX pipes in installations that require an excellent degree of resistance to corrosion and high mechanical performance. For the management of cables in industrial plants, especially food, beverage and agricultural industries.

Solutions



RINOX Stand off Clamp

Main technical characteristics

INOX	DN NW16, NW20, NW25, NW32, NW40, NW50	-45 / 250 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
ETIM 10 EC000127			

Product data

DN	Ref	kg/u	
NW16	55034016	0,006	20
NW20	55034020	0,012	20
NW25	55034025	0,014	20
NW32	55034032	0,012	20
NW40	55034040	0,011	10
NW50	55034050	0,029	10

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

