



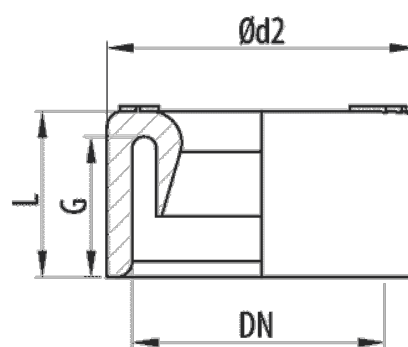

Description

Plastic terminal for the protection of the cable exit in the ends of RR and RL rigid conduits. Made of translucent polyethylene for the protection of the exit of the cable in the end of the corrugated conduit. Available in several sizes.

Advantages

Perfect adjustment on the end of the conduit.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Available in various sizes.

It protects the exit of cables from friction or superficial damages.

Applications

Suitable for the protection of the ends of RL, RR, RLGC, RRG, RAL, RINOX metal rigid conduit in building, tertiary and industrial applications with high safety requirements. Premises of public attendance or with risk of fire or explosion.

Solutions



Product data

ETIM 10	EC000937	Material	PVC
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Working temperature range (°C)	-5 / 60 °C
Colour	Grey RAL 7035	Fire resistance	Flame retardant
DN	NW25		
kg/u	0,005		
u	100		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

