


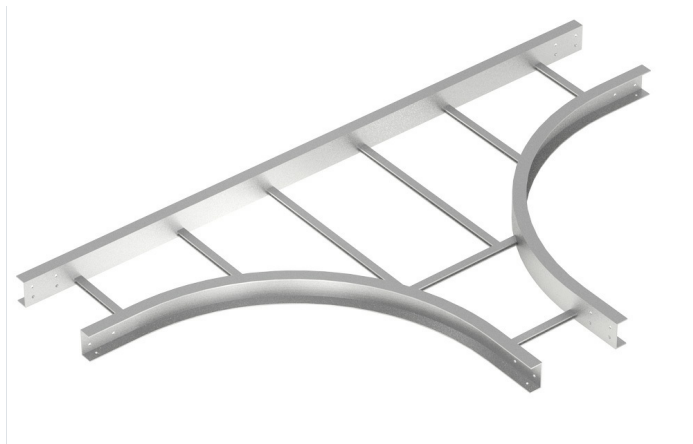

Description

Metal accessory with welded safety edge, for creating a Tee at any point in the Megaband® CPS ladder. It facilitates the creation of a Tee in the layout of the ladder. Made from Aluminium alloy 6063T6.

Advantages

Available in 100 mm height and 200, 300, 400 and 600 mm wide.

Only the Megaband® M8 joint kit or M8 nuts and bolts required

In accordance with the IEC 61537 and CE standard with respect to directive 2014/35 / EU.

Made of Aluminum alloy 6063T6. Excellent corrosion resistance.

CEPSA product approval according to ESP-2208-5 specification.

Applications

Suitable for cable conduit installations in the Oil & Gas and Petrochemical Industry, Offshore Platforms, Ports and Maritime Applications in general. Industrial projects in aggressive environments and with high corrosion on the coast and seashore, Power Plants and Renewable Energy.

Solutions



Main technical characteristics

 AL	 100	 200, 300, 400, 600	 800	 1	 Aluminum	 20 J	 -50 / 150 °C	
 A1 No combustible	ETIM 10		EC001540					

Product data

	Ref	kg/u
200	82002335	14,500
300	82002336	15,400
400	82002337	16,300
600	82002338	19,000

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic