


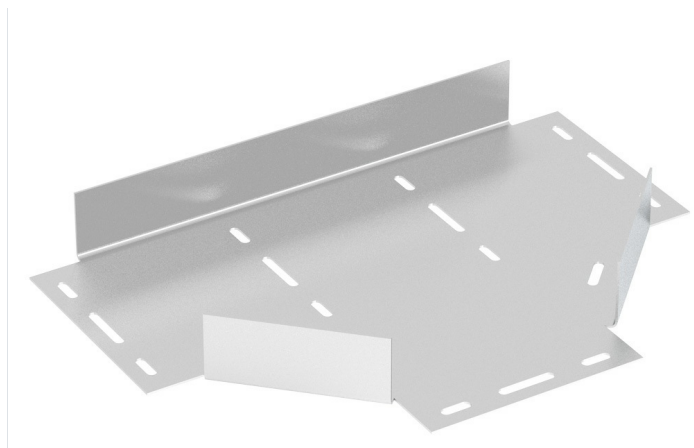

Description

Metal Tee piece for Pemsaband® PQU AL trays. Of 30 mm height, Width 300 mm, With AL protection system. It facilitates the creation of a Tee at any point, even if they are different widths. Assembly using bolts. Made from Aluminium alloy 1050H24.

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

Mounting and fastening by using screws.

CEPSA product approval. Designed according to ESP-2208-5 specification.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



Product data			
ETIM 10		EC001544	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		AL	
Finish		1050H24 Aluminium	
Flange (mm)		30	
Width (mm)		300	
R (mm)		200	
kg/u		2,550	
u		1	
Material		Aluminum	
Impact Strength (J)		20 J	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

