


TFA 7035 Conduit

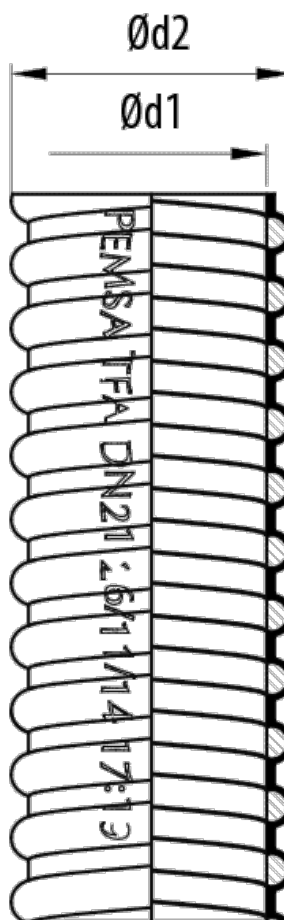

Description

TFA corrugated PVC flexible conduit for the protection of wiring in the tertiary sector. Flexible conduit with an internal rigid PVC spiral, watertight protection (IP65), compression strength of 320 N and impact resistance of 6 J. Available in grey (RAL 7035), in a wide variety of sizes.

Advantages

High aesthetic component. RAL 7035 grey same as the other conduits or electrical materials.

No flame propagation.

High degree of tightness with RGP or P fittings.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of flexible PVC and reinforced with a rigid spiral.

Applications

Suitable for the protection of wiring and conductors in building, tertiary sector, machinery and industry.

Solutions



SERVICE AND RETAIL



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

Colour	Grey RAL 7035	DN	NW 9, NW11, NW13, NW16, NW21, NW29, NW36, NW48		 PVC	 2421	 320 N	 6 J	
				ETIM 10 EC001177					
 IP65	 -5 / 60 °C	 Flame retardant							

Product data

DN				Ref	kg/u	
NW 9	11.8	15.7	16	10011209	0,071	25
NW11	14.7	18.7	20	10011211	0,079	25
NW13	16.8	20.7	22	10011213	0,106	25
NW16	18.1	22.8	24	10011216	0,121	25
NW21	23.6	28.9	30	10011221	0,166	25
NW29	30.5	37	38	10011229	0,252	25
NW36	40	47.2	48	10011236	0,382	25
NW48	53.1	60	60	10011248	0,418	20

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic