


Serrated Hexagon Flange Nut

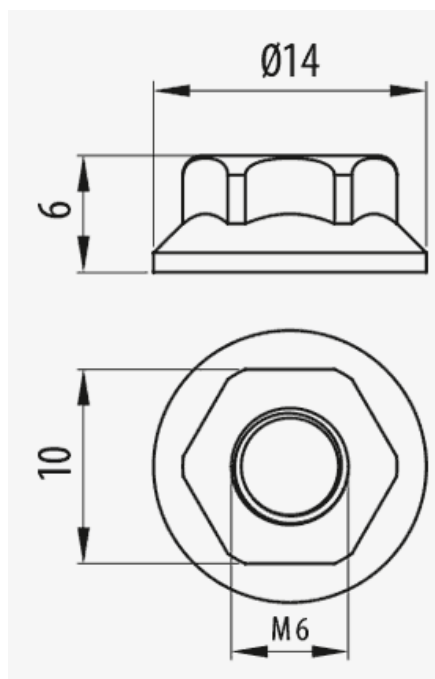

Description

M6 metal nut with serrated flange to be used together with a bolt for the fixing of accessories, brackets or joining straight sections of Pemsaband® trays. Suitable for Pemsaband® trays of 35, 60 and 85 mm in height.

Advantages

The serrated edge reinforces the tightening of the nut on the bolt.

Very versatile piece.

CE conformity to directive 2014/35 / EU.

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

Applications

Suitable for the fixing together, along with the C/Din screw, of straight sections, accessories, bends, tees and supports for installations of Pemsaband® One perforated and solid, Pemsaband® PQU and Pemsaband® PQW metal trays in the management and distribution of cables for Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructure installations as well as for tunnels and installation galleries.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 M 6	 kg/u 0,004	 50	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC003863
---	--	--	--	---	---------------------

Product data

			
EZ	Class 3	64010059	Steel with surface coating
GC	Class 8	64030059	Steel with surface coating
INOX	Class 9D	64060059	Acero inoxidable AISI 316L
BK8	Class 8	64080059	Steel with surface coating

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic