


# Serrated Hexagon Flange Nut ( Ref: 64080059

1/2

)

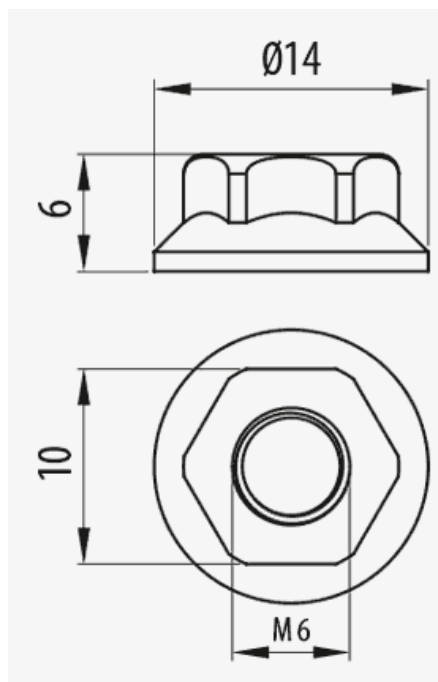

## Description

M6 metal nut with serrated flange to be used together with a bolt for the fixing of accessories, brackets or joining straight sections of Pemsaband® trays. M 6, M 6, With BK8 protection system, BK8-ZNI finish. Suitable for Pemsaband® trays of 35, 60 and 85 mm in height.

## Advantages

CE conformity to directive 2014/35 / EU.

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

The serrated edge reinforces the tightening of the nut on the bolt.

Very versatile piece.

## Applications

Suitable for the fixing together, along with the C/Din screw, of straight sections, accessories, bends, tees and supports for installations of Pemsaband® One perforated and solid, Pemsaband® PQU and Pemsaband® PQW metal trays in the management and distribution of cables for Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructure installations as well as for tunnels and installation galleries.

## Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



|                                       |                   |                                |                            |
|---------------------------------------|-------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC003863          | u                              | 50                         |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |                   | Material                       | Steel with surface coating |
| Protection System                     | BK8               | Working temperature range (°C) | -50 / 150 °C               |
| Finish                                | Zinc Nickel black | Fire resistance                | A1 No combustible          |
| Resistance Class                      | Class 8           |                                |                            |
| M/PG                                  | M 6               |                                |                            |
| kg/u                                  | 0,004             |                                |                            |

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC - Electrogalvanised Bichromate**

### BK8 - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

## PA12 - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic

