
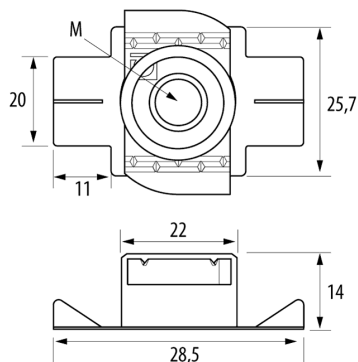


Plan Channel Nut Safe&Fast (Ref: 81000484)

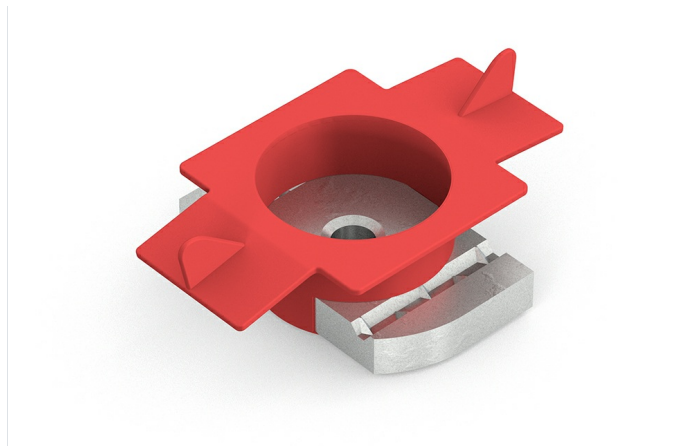

Description

M 8, M 8, With GC protection system, HDG finish

Advantages

CE conformity to directive 2014/35 / EU.

Discover the innovation that makes installation easier and more efficient. With our exclusive plastic insert, twisting and positioning the piece on the channel or strut has never been easier. This design ensures a perfect and secure fit, saving time and effort with every installation.

Suitable for placing inside the channel, both for the fixing of channel accessories or brackets to it.

Use with hexagonal bolt M6, M8 or M10.

Applications

Suitable for the fixing of channel supports and structures for installations of Pemsaband® and Rejiband® metal trays in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial installations and tertiary sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."






Product data			
ETIM 10		EC000096	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 6	
Flange (mm)		14	
M/PG		M 8	
		kg/u	0,027
		Material	Steel with surface coating
		Working temperature range (°C)	-50 / 150 °C
		Fire resistance	A1 No combustible

Ⓢ Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Ⓜ Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

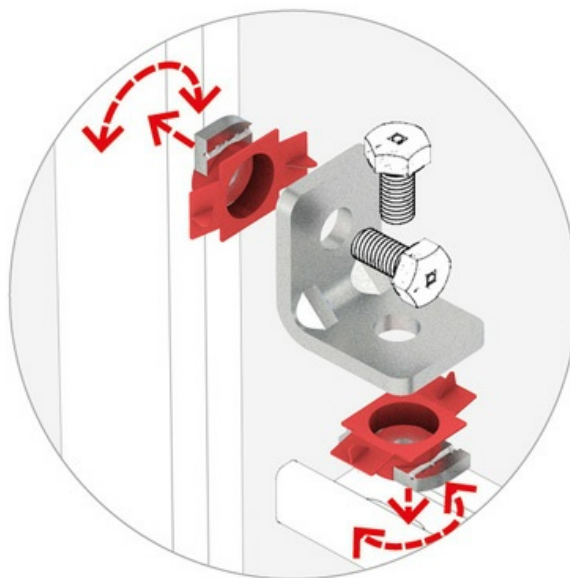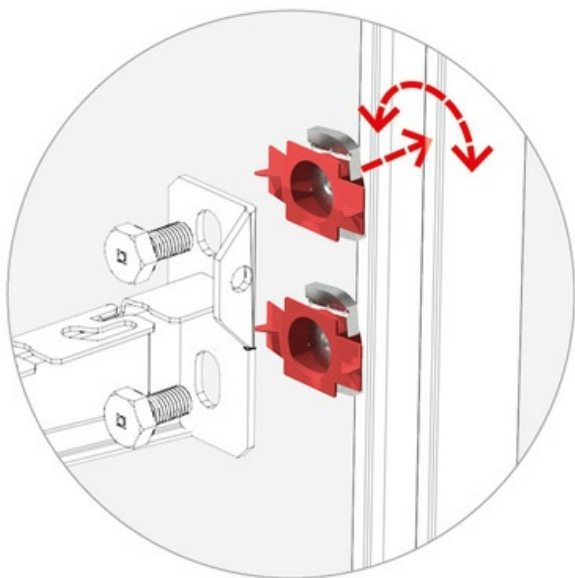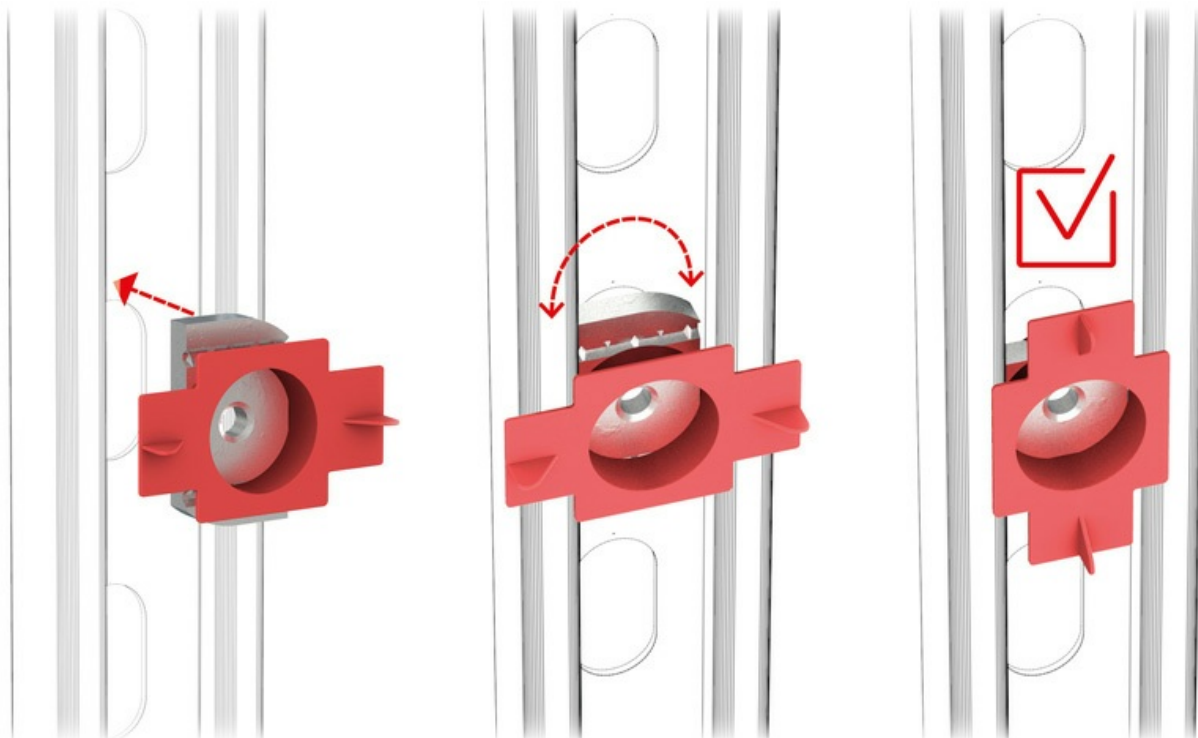

Plan Channel Nut Safe&Fast (Ref: 81000484)

