
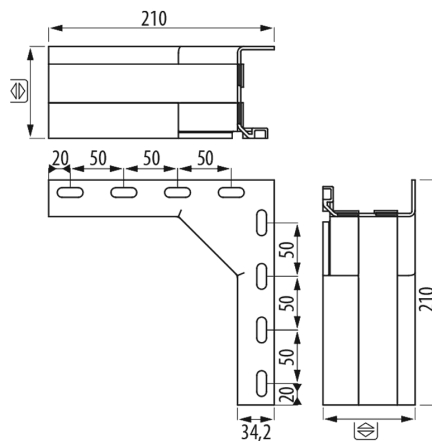


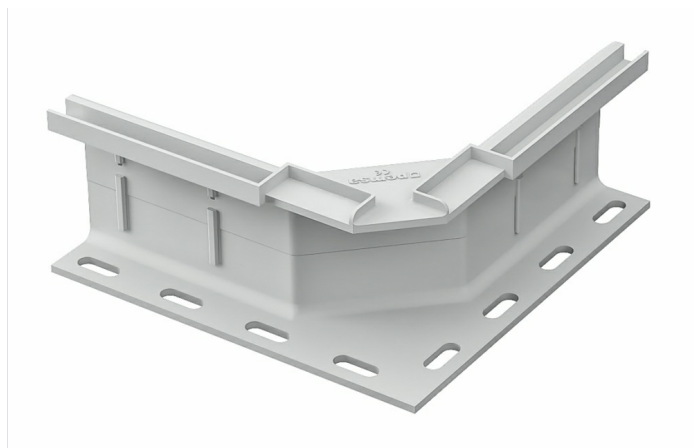

Description

Fitting for the construction of T-joints or crossovers of Metatray® insulating trays for the conduction of electrical and telecommunication cables. Made of PVC-based thermoplastic insulating material. Colour grey RAL 7035.

Advantages

Versatile connector that facilitates the creation of T-Joints and Crossover junctions with a single reference.

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Insulating material, electrical safety and reduced maintenance costs.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Applications

Suitable for the construction of T-branches and crossings for cable management in electrical and telecommunications installations in different sectors, from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that complies with the most demanding standards. Likewise, its application is also ideal in other different sectors: solar roofs, self-consumption, tertiary, telecommunications, electric mobility through vehicle charging stations, etc.

Solutions



Product data

ETIM 10	EC002406	Material	PVC
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,001	Working temperature range (°C)	-20 / 60 °C
Colour	Grey RAL 7035	Fire resistance	GRADO UL94: V0
Flange (mm)	100	UV Behaviour	Resistant acc. to UL568
kg/u	0,302		
u	4		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product applications



