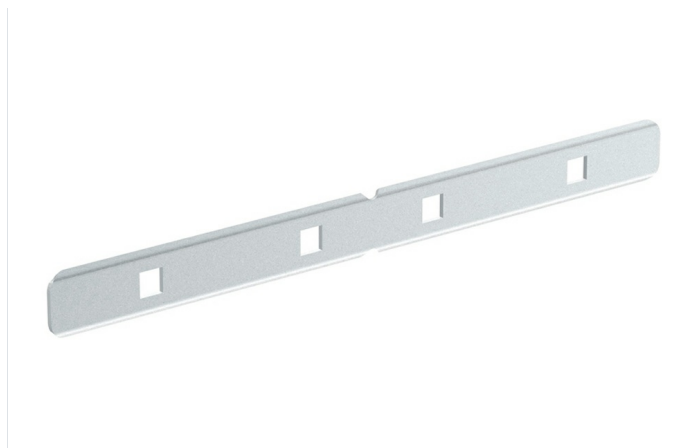


Description

Connector for joining straight sections of solid or perforated Pemsaband® tray in heights of 35, 60 and 100 mm. Of 60 mm height. It is necessary to use 2 connectors, one on each side of the tray. Available in GC and PG Protection Systems.

Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Electrical continuity guaranteed according to standard IEC61537.

Suitable for the joining of different lengths of Pemsaband® One perforated and solid trays of heights 35, 60 and 100 mm.

Also used to join mitred sections to form angles.

Applications

Suitable for joining straight lengths of Pemsaband® One perforated, solid and RX tray for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Product data			
ETIM 10		EC002413	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,327	
Protection System		PG	
Finish		PG3, Pregalvanised	
Resistance Class		Class 3	
Flange (mm)		60	
kg/u		0,101	
u		50	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🧊 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

