


Pemsaband/Megaband Coupler

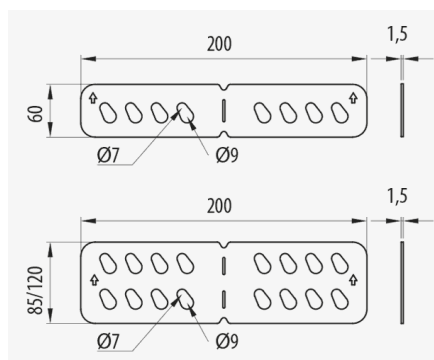

Description

Connector for joining cut sections of Pemsaband® tray and Megaband® ladder using M6 and M8 bolts and nuts. Suitable for Pemsaband® tray and Megaband® ladder with heights of 35, 60, 85, 100 and 120 mm. Available in GC or PG Protection System.

Advantages

It allows the joining of cut straight sections.

Suitable for Pemsaband® tray and Megaband® ladder in heights of 35, 60, 85, 100 and 120 mm.

Electrical continuity guaranteed according to standard IEC61537.

Available in various protection systems: EZ, GC and stainless steel AISI 304 and AISI 316L.

Applications

Suitable for joining straight lengths of Pemsaband® One perforated, solid and Megaband® tray for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 60, 100	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC002413
--	--	---	---------------------

Product data

						
EZ	Class 3	60	93910002	0,076	50	Steel with surface coating
EZ	Class 3	100	93910003	0,113	20	Steel with surface coating
GC	Class 6	60	93930002	0,081	50	Steel with surface coating
GC	Class 6	100	93930003	0,120	20	Steel with surface coating
INOX	Class 9C	60	93950002	0,075	50	Stainless steel AISI 304
INOX	Class 9D	60	93960002	0,075	50	Acero inoxidable AISI 316L

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Product applications

