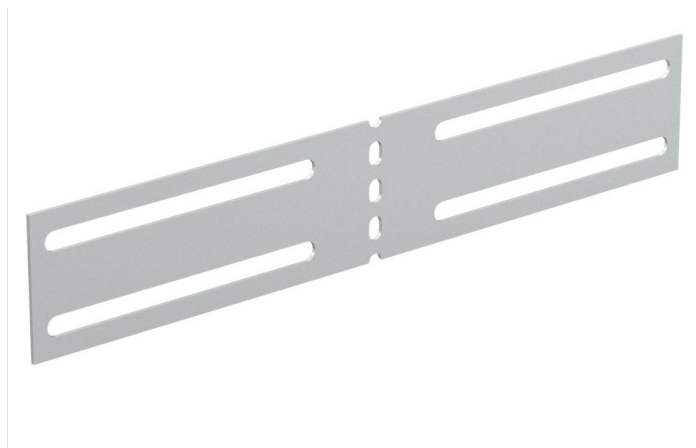


Description

Variable angle joint and accessories for Nemaband® ladder. Of 100 mm height. Fixing using M8 hexagonal bolts and nuts. Made from steel with GC Protection system.

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Available in 70, 100 and 150 height.

Very simple assembly by fixing the coupler to the Nemaband® cable ladder using M8 or M10 hexagonal screws and nuts.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for joining variable angles in Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



Product data			
ETIM 10	EC002413	u	5
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,908	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	A1 No combustible
Resistance Class	Class 7		
Flange (mm)	100		
kg/u	0,351		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic