
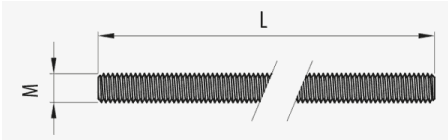


Threaded Rod (Ref: 67080045)

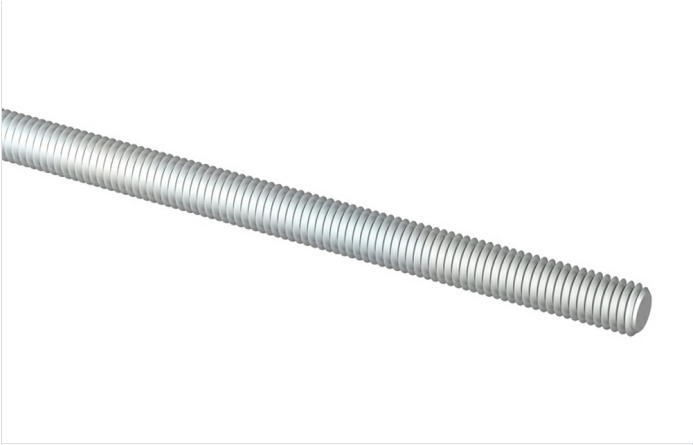

Description

M 8, M 8, M 8x1000 mm, With BK8 protection system, BK8-ZNI finish

Advantages

Applications

Solutions





Product data			
ETIM 10		EC000028	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		BK8	
Finish		Zinc Nickel black	
Resistance Class		Class 8	
M/PG		M 8	
L (mm)		1000	
kg/u		0,320	
		u	50
		Material	Steel with surface coating
		F (kg)	400
		Working temperature range (°C)	-50 / 150 °C
		Fire resistance	E90 (90 min. 1000°C)

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Load diagrams

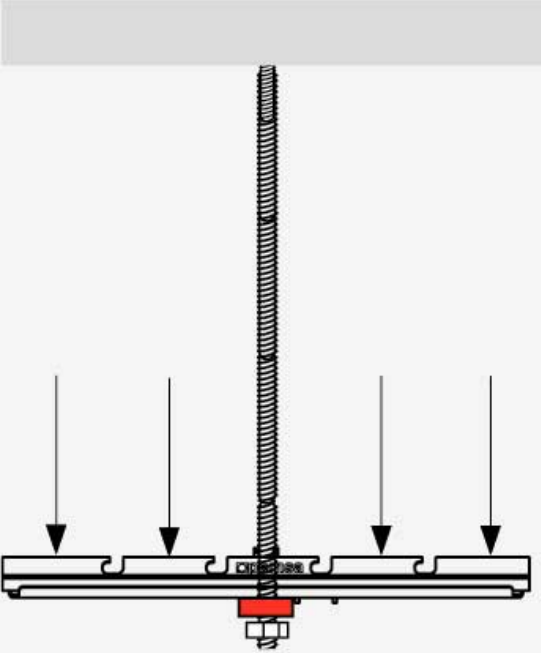↓CTA↓ (kg)		kg
una varilla / one rod / uma varão		
	100-300	160

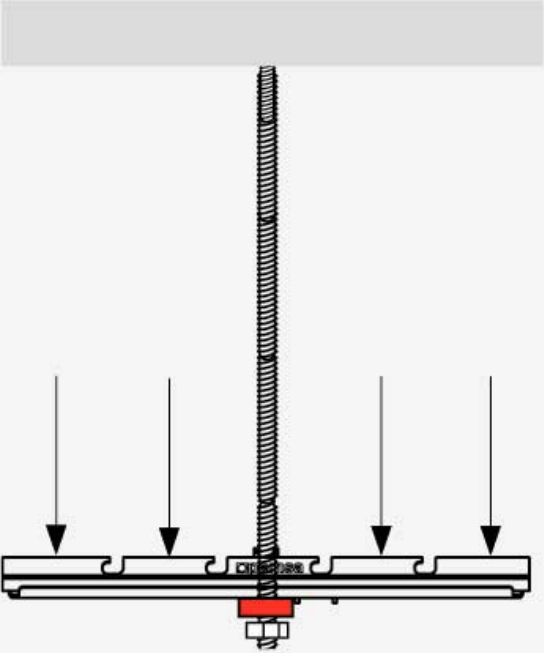↓CTA↓ (kg)	◀▶	kg
una varilla / one rod / uma varão		
	100-300	160

Product applications



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



