


Insert-A



□

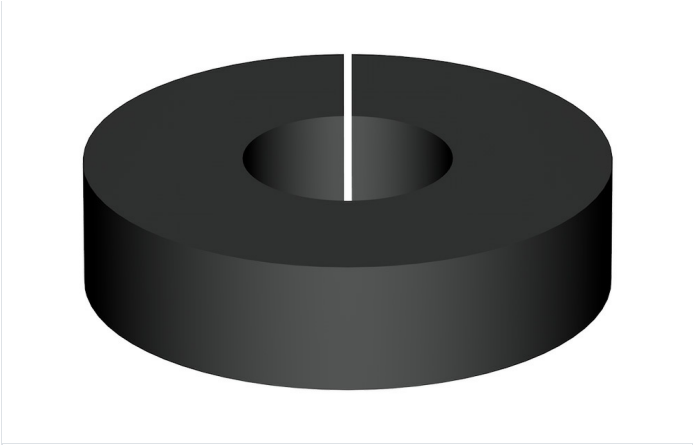

Description

Advantages

Applications

Solutions



Main technical characteristics												
COLOUR	Noir RAL 9005	DN	DN 5		PG13, PG16, PG21	1		NBR		IP65		-40 / 100 °C
	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA					ETIM 10 EC002318						

Product data				
PG13	16	40030913	0,002	50
PG16	18	40030916	0,002	25
PG21	22	40030921	0,004	25

Système de Protection	
CU	- Cuivrage
PG	- Pre-galvanisé
EZ	- Electrozingage
BC	- Electrogalvanised Bichromate / Electrozingage Bichromaté
BK8	- Protection Haute Résistance
GC	- Galvanisation à Chaud /
INOX	- Acier Inoxydable. AISI 304, AISI 316L
PT	- Peinture Polyester
AL	- Aluminium
LN	- Laiton or Laiton Nickelé

M Matériaux isolants	
PC+ABS	- Halogen Free Polycarbonate + ABS / Polycarbonate + ABS sans halogène
PVC	- Polychlorure de vinyle
PP	- Polypropylène sans halogène
PA6	- Polyamide 6 sans halogène
PA12	- Polyamide 12 sans halogène
PU	- Polyuréthane
PE	- Polyéthylène
NBR	- Caoutchouc NBR
PET	- Polyesterester Thermoplastique
TPV	- Thermoplastique