


Fast Hold Down Bracket Pemsaband

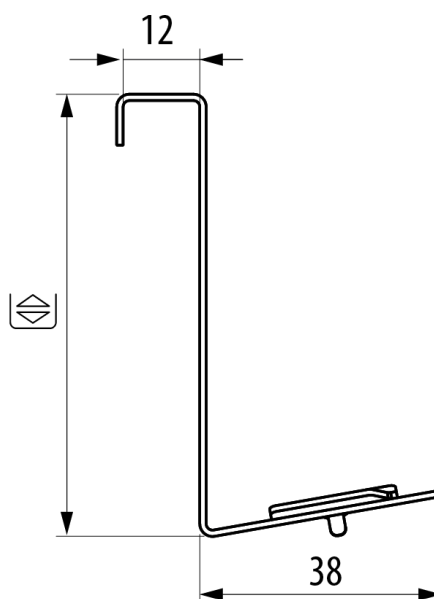

Description

Fast hold down clamp for fixing cable ladder and cable trays to 41x21 and 41x41 channel and cantilever arms in both ceiling and wall installations. It facilitates the connection to the strut without additional screws thanks to the lower twist and lock part.

Advantages

Quick connection without screws to channel and strut in only two steps.

No screws or other fasteners required. 50% savings on installation costs.

Wide range. Available in heights of 35, 60, 85, 100, 120 and 150mm.

In accordance with CE standard with respect to directive 2014/35 / EU.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Used for the connection of Pemsaband cable trays and Megaband® One cable ladders to 41x21 and 41x41 channel for installations of the ladder from the ceiling or to the wall in the management and distribution of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector etc.

Solutions



Fast Hold Down Bracket Pemsaband

Main technical characteristics

 GC	 Class 8	 35, 60, 100, 120, 150	 10	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible
ETIM 10						
EC001005						

Product data

	Ref	kg/u
35	81000253	0,021
60	81000254	0,025
100	81000256	0,032
120	81000257	0,036
150	81000258	0,041

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic




www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Fast Hold Down Bracket Pemsaband


Product applications

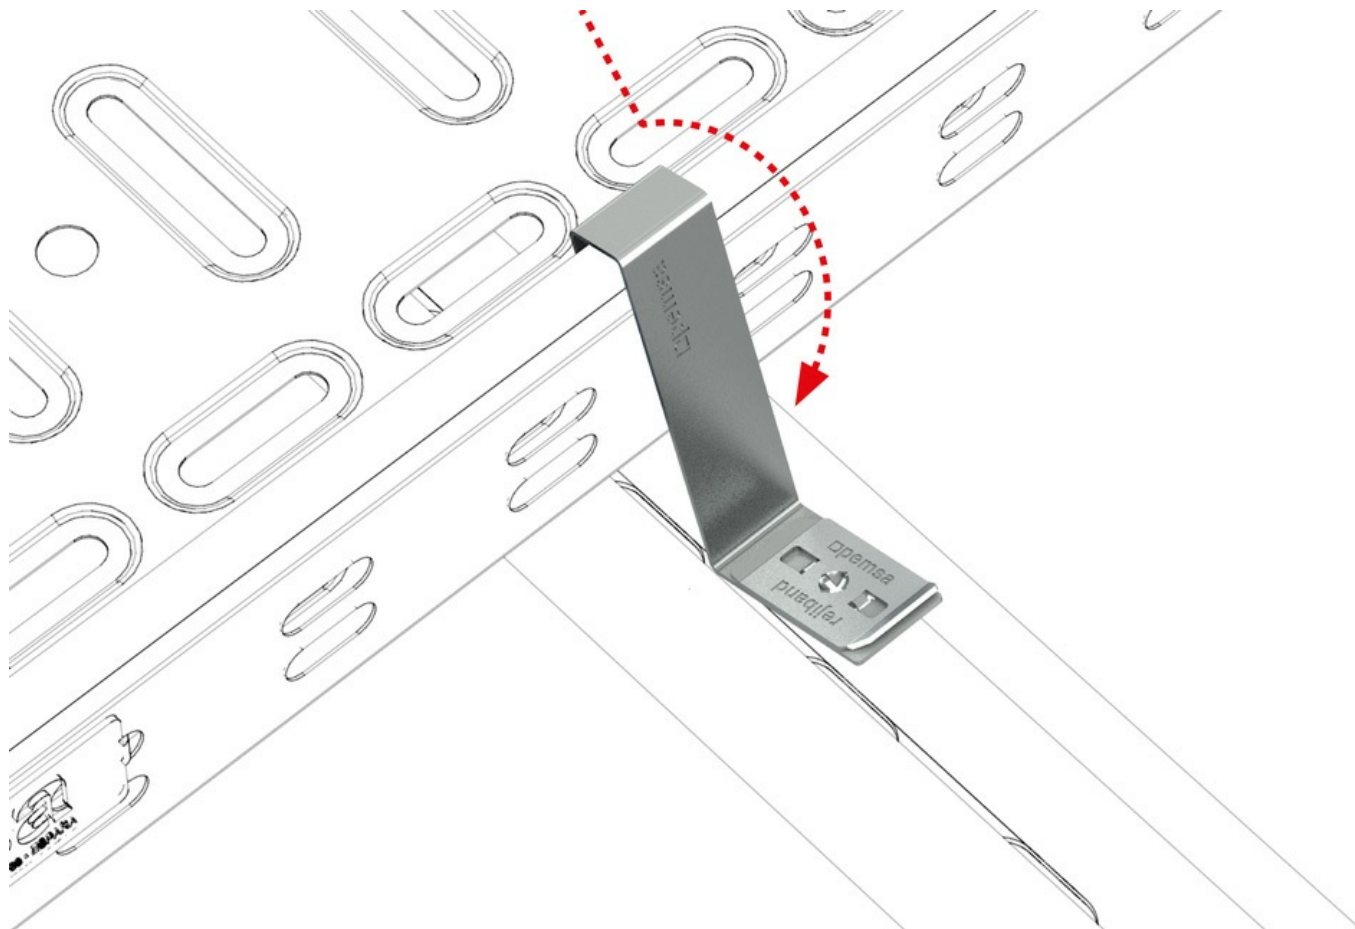

Fast Hold Down Bracket Pemsaband

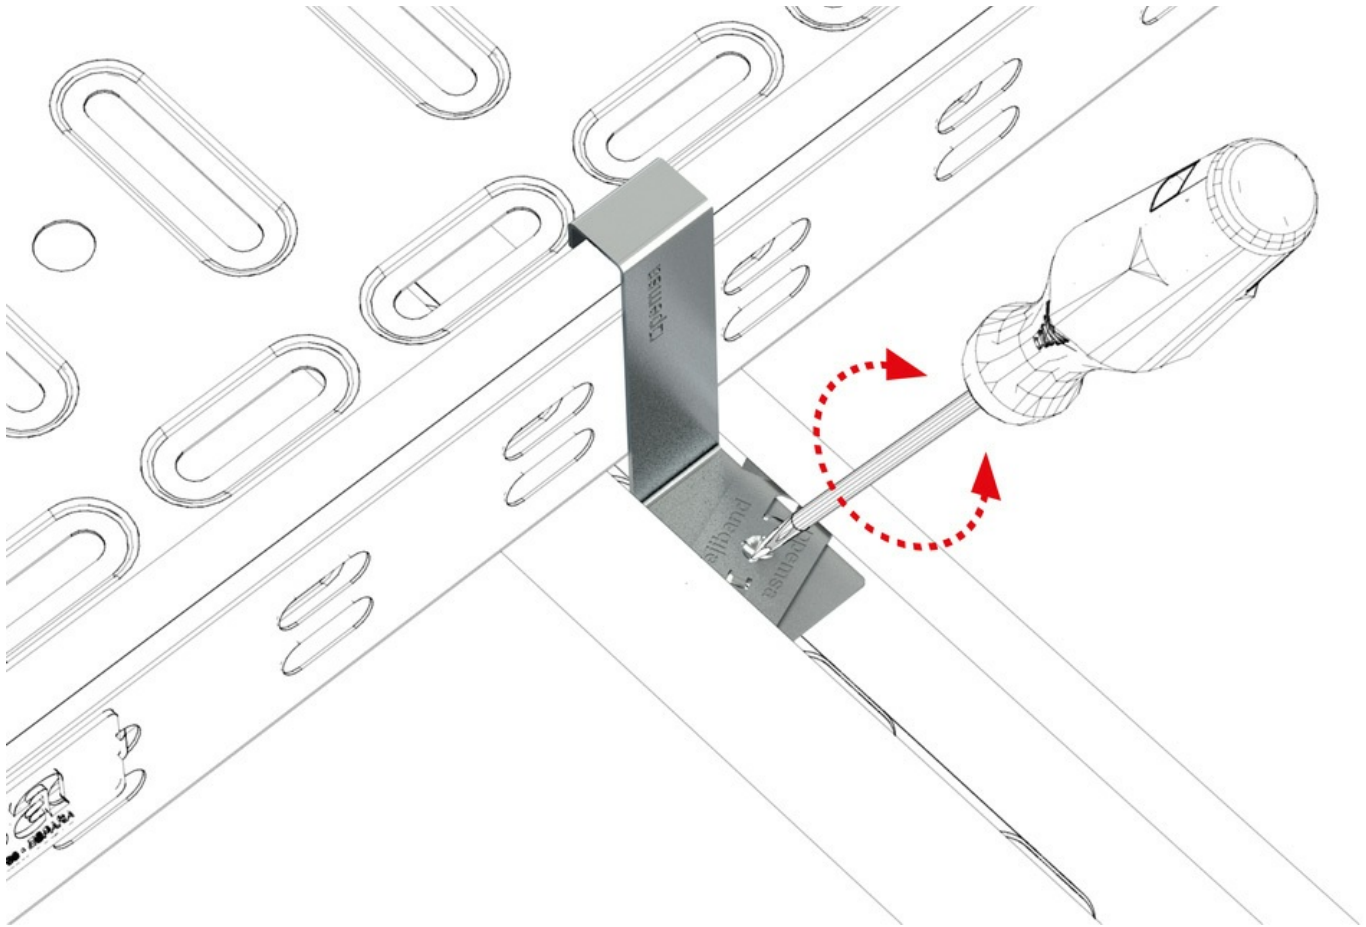

Fast Hold Down Bracket Pemsaband

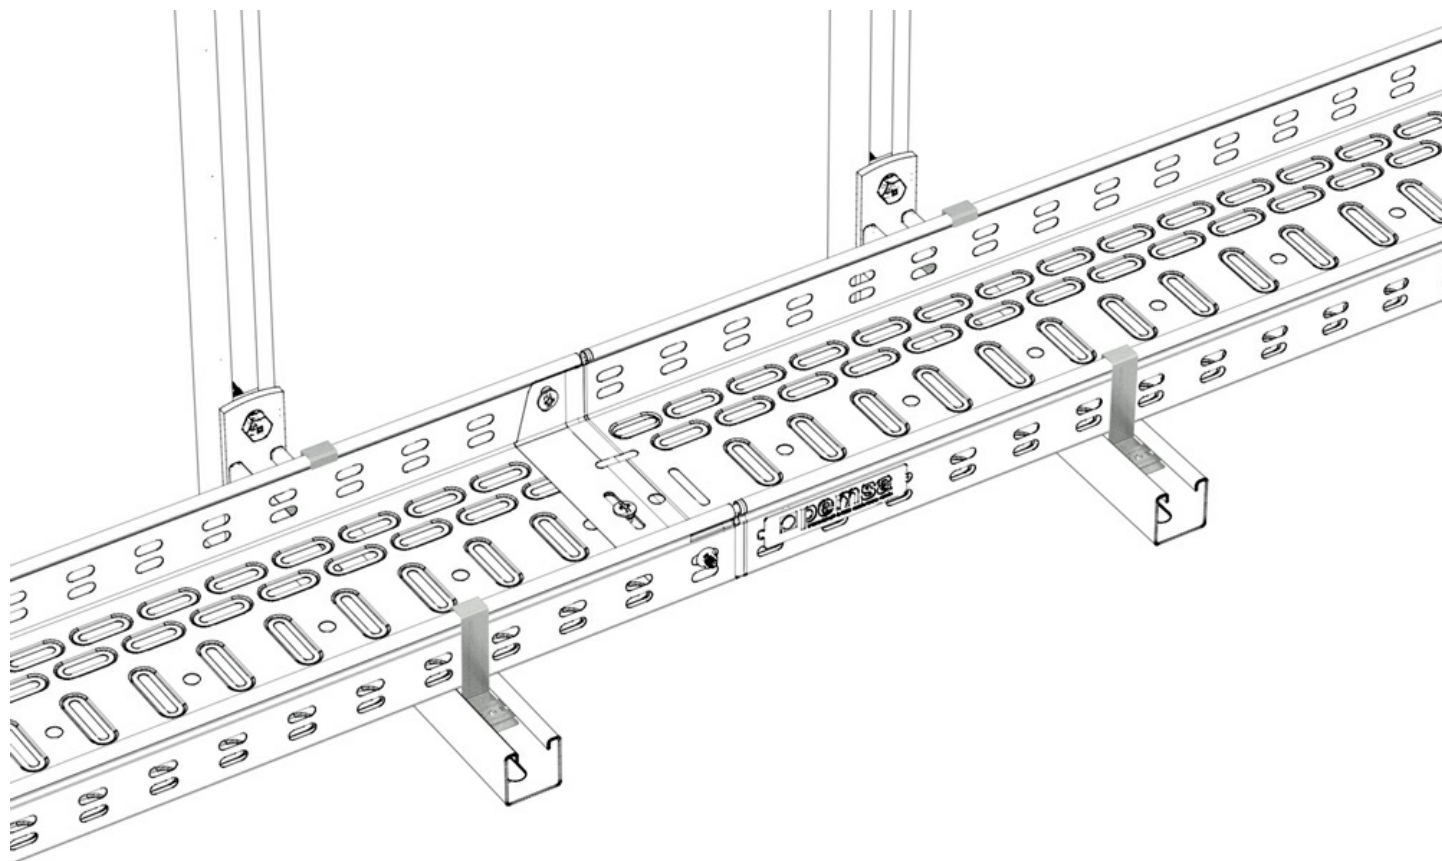

Fast Hold Down Bracket Pemsaband

