
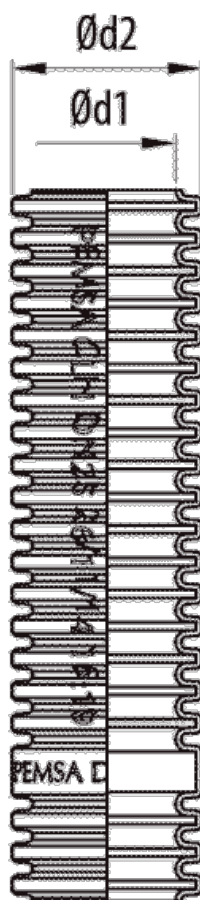


CLH Halogen Free Corrugated Conduit (

1/2

Ref: 10040250)

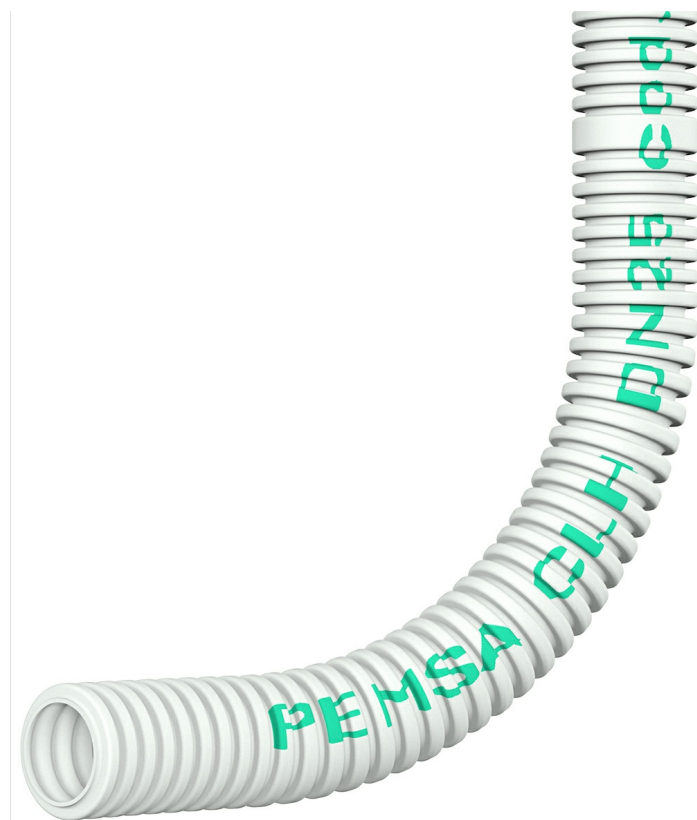

Description

CLH corrugated flexible conduit for the protection of electrical cables in building and tertiary applications. Made of plastic material (PP), halogen-free according to EN 50642 / EN IEC 63355 standard, with an IP65 protection rating, 320 N compression strength and 2 J impact resistance. Available in grey (RAL 7035), in various sizes.

Advantages

Suitable for installation in false ceilings and on interior walls and floors.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

CE conformity with directive 2014/35 and EN IEC 61386-22.

Halogen-free according to EN 50642 /EN IEC 63355

Impact resistance. Grade 3, 2 Joules

Applications

Suitable for the protection of electrical wiring in building applications, tertiary sector and industry.

Solutions



SERVICE AND RETAIL



www.pemsa-rejiband.com

Any information included in this document is property of Pemsaband. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsaband. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsaband, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsaband Cable Management, S.A."



CLH Halogen Free Corrugated Conduit (

Ref: 10040250)

Product data				
ETIM 10		EC001175	Material	Polypropylene
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0	Cod. IEC.61386	23323
Colour		Grey RAL 7035	Compression strength (N)	320 N
DN		NW50	Impact Strength (J)	2 J
Ø d1 (mm)		40.4	IP	IP65
Ø d2 (mm)		50	Working temperature range (°C)	-15 / 90 °C
R (mm)		70	Fire resistance	Flame retardant
kg/u		0,159		
u		25		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

