


Articulates Riser Section MEGAband (Ref: 93415450)

1/6

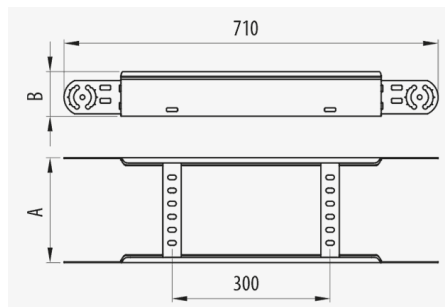

Description

Articulated metal accessory consisting of a straight section with two welded crosspieces, with safety edge for the creation of a level change in the Megaband® ladder. Of 120 mm height, Width 450 mm, With PG protection system, PG3 finish. It allows to make rises, drops and changes of height in variable angles of 15, 30, 45 and 90°. Quick connection assembly using the click system, without joints. Made of steel in various sizes and Protection Systems.

Advantages

Curved safety edge which offers maximum protection.

Available in various protection systems: GC and stainless steel AISI304 and AISI316L.

The angle is variable by 15°, 30°, 45° and 90°. Sections can be coupled together to provide a greater radius for large cables.

Electrical continuity guaranteed according to standard IEC61537.

Use in conjunction with Megaband® articulated riser plates and Megaband® M8 joint kit or M8 nuts and bolts.

Applications

Suitable for level changes in cable management in Megaband® ladders in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC001535	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	8,143	Material	Steel with surface coating
Protection System	PG	Impact Strength (J)	20 J
Finish	PG3, Pregalvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 3	Fire resistance	A1 No combustible
Flange (mm)	120		
Width (mm)	450		
kg/u	2,521		

Protection System


- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Articulates Riser Section MEGAband (Ref: 93415450)

Product applications

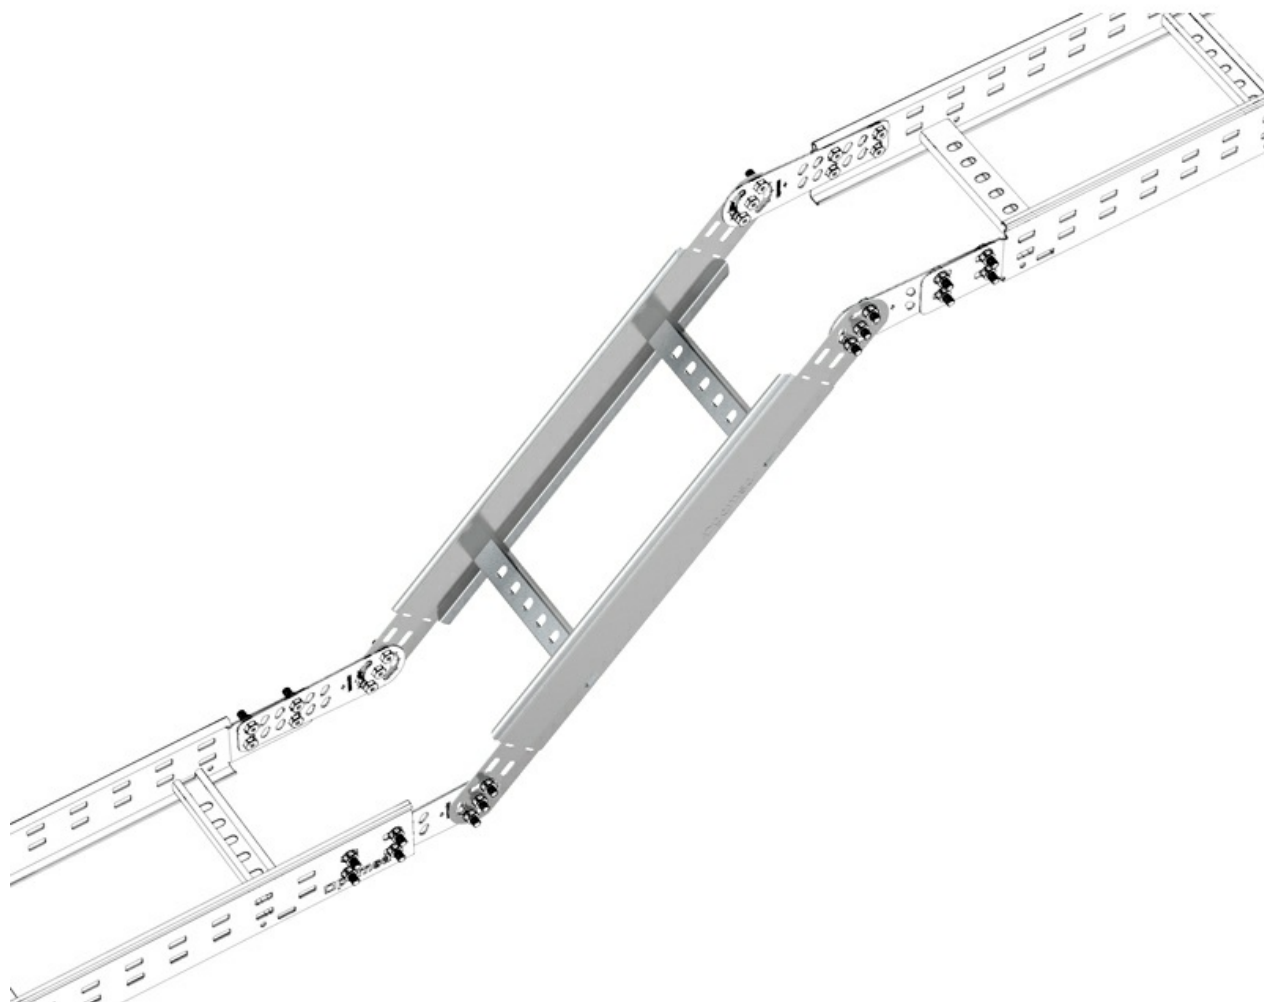


www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Articulates Riser Section MEGAband (Ref:

93415450)

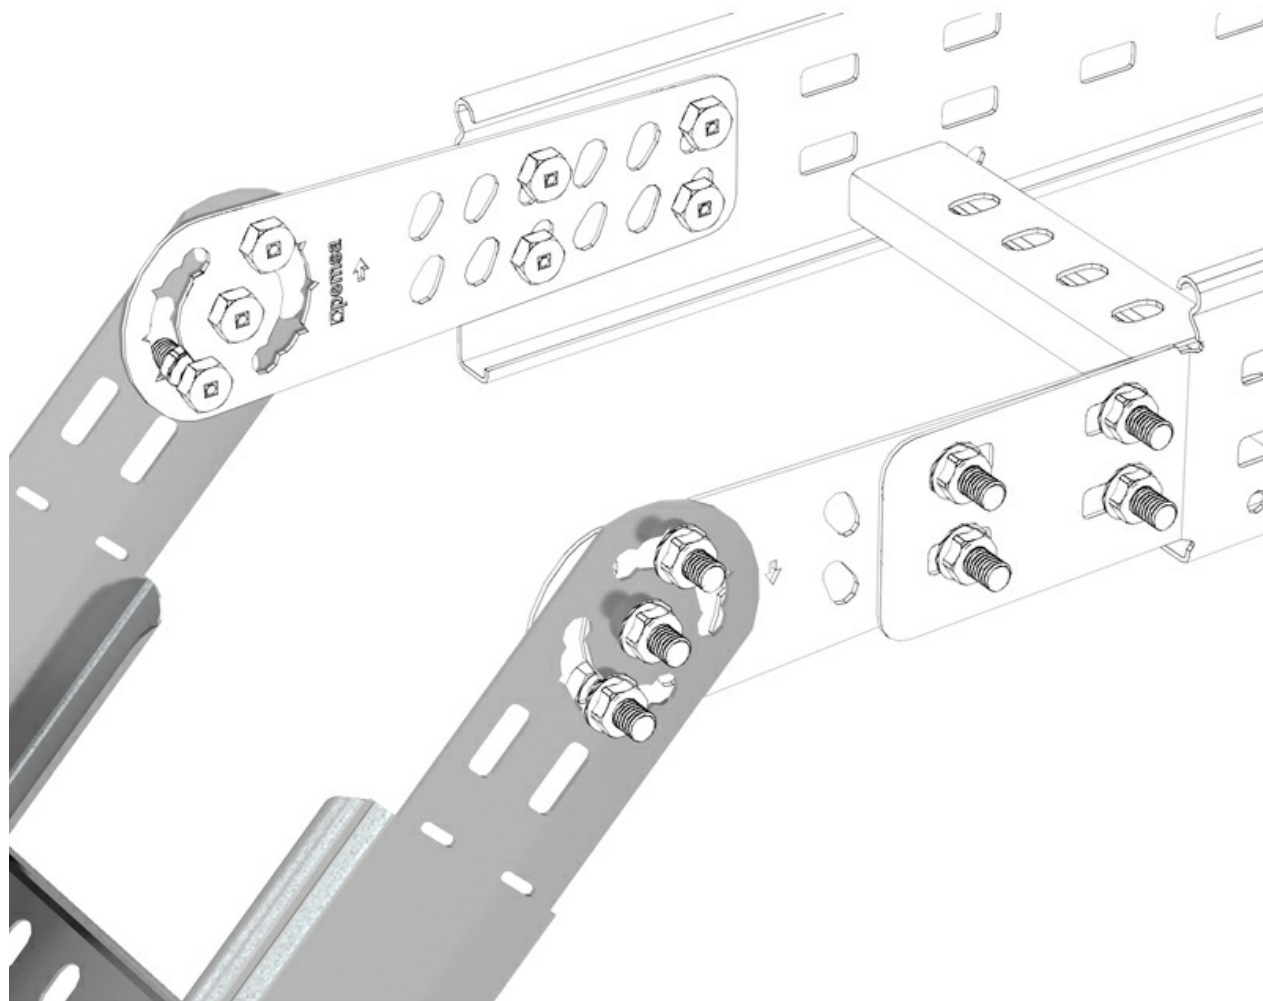

Articulates Riser Section MEGAband (Ref: 93415450)

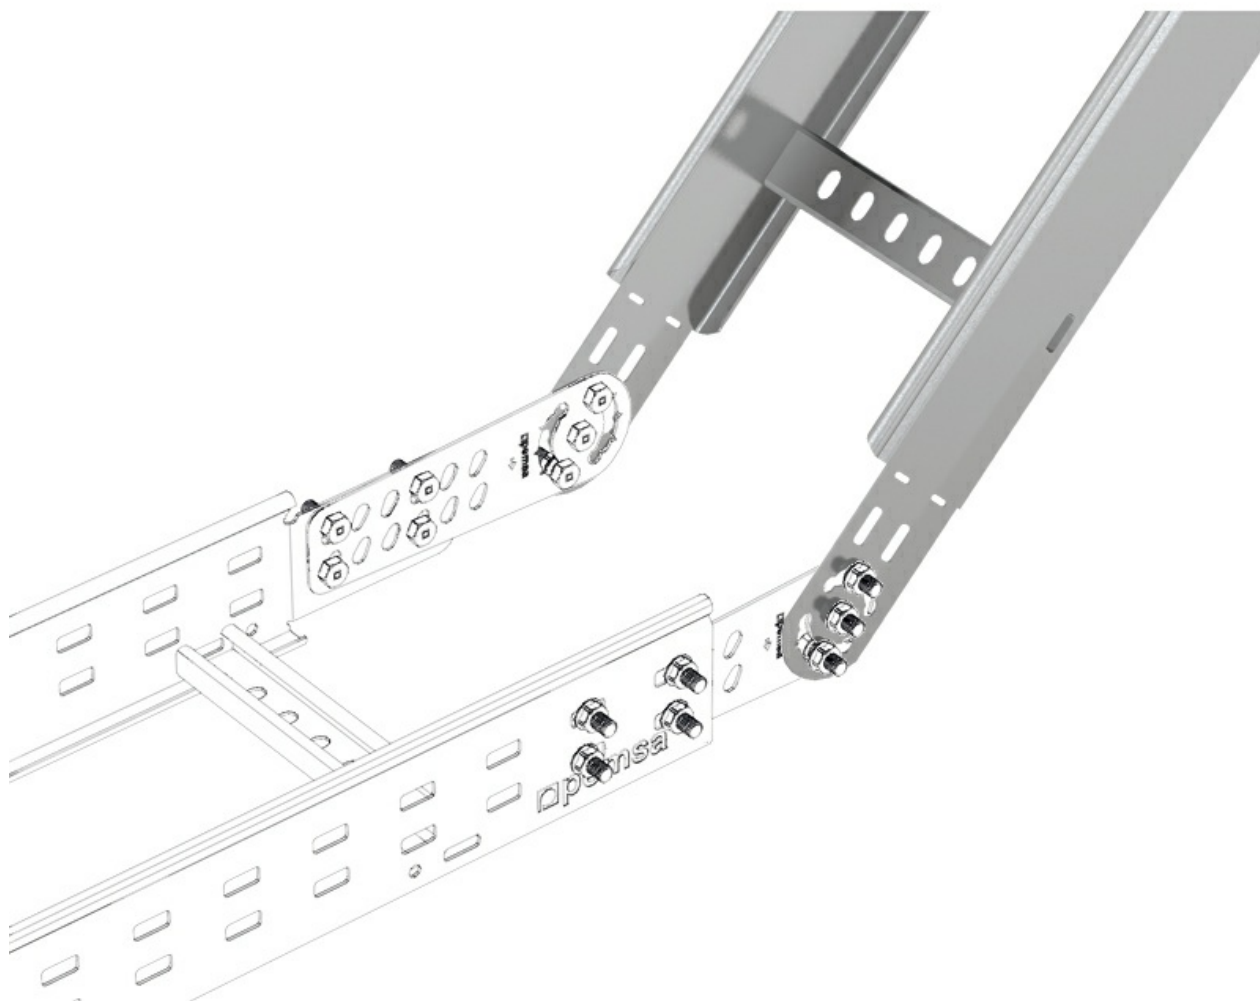

Articulates Riser Section MEGAband (Ref: 93415450)

