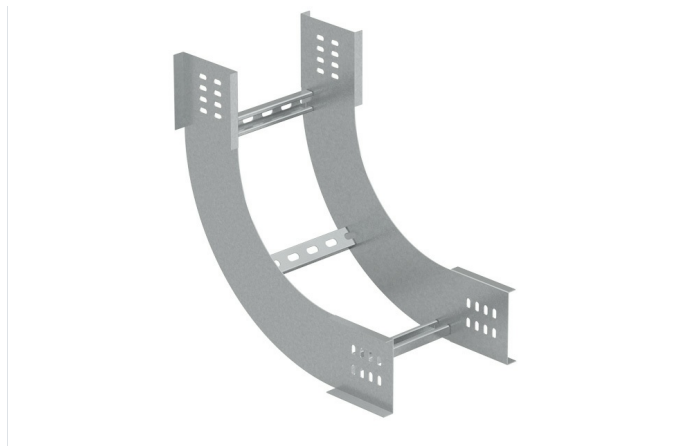


Description

Metal accessory for creating an inside riser in the wiring installation with the Nemaband® ladder. Of 100 mm height, Width 600 mm, Angle of 30 °. It allows angles or descent and height changes to be made with great ease avoiding damage to the cable routing. Made from steel with GC Protection system.

Advantages

Cable tray connection using M8 screws or Nemaband® M8 joint kit

Inside and Outside risers availables in 90°, 60°, 45°, 30° angles.

Electrical continuity guaranteed according to standard IEC61537.

Reinforced profiles in C and Z formats that stiffen the construction of the cable ladder, to meet the demand in most markets.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating level or height changes in the Nemaband® ranges for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



Product data

ETIM 10	EC001535	kg/u	3,660
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	9,479	u	1
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Impact Strength (J)	20 J
Resistance Class	Class 8	Working temperature range (°C)	-50 / 150 °C
Flange (mm)	100	Fire resistance	A1 No combustible
Width (mm)	600		
R (mm)	300		
Angle	30		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic