


## 90° Outside Riser MEGAband ( Ref: 93655300 )

1/4

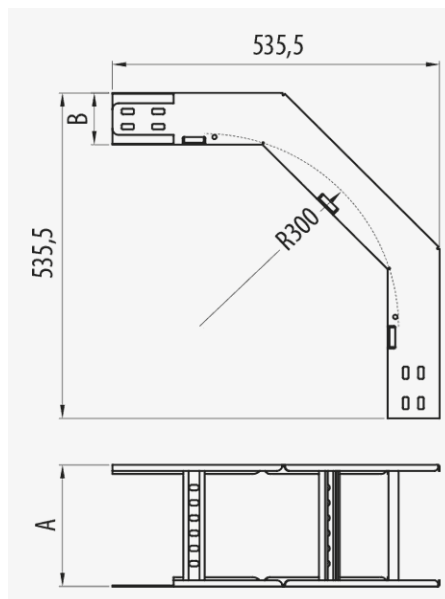

### Description

Metal accessory for the creation of an outside riser in the wiring installation with the Megaband® ladder. Of 120 mm height, Width 300 mm, With INOX protection system, I304 finish. It allows to make drops and changes of angle at 90° with great ease. Quick connection assembly using the click system. Made of steel, in various sizes and Protection Systems. Bending radius 300 mm. Check availability of 600 mm radius.

### Advantages

Curved safety edge which offers maximum protection.

Connection to ladder by rapid assembly Click system. Only the Megaband® M8 joint kit or M8 nuts and bolts required

Available in various protection systems: EZ, GC and stainless steel AISI 304 and AISI 316L.

Electrical continuity guaranteed according to standard IEC61537.

Its design allows to make drops and changes of height with ease.

### Applications

Suitable for level changes in cable management in Megaband® ladders in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                              |                          |                                       |                          |
|----------------------------------------------|--------------------------|---------------------------------------|--------------------------|
| <b>ETIM 10</b>                               | EC001535                 | <b>kg/u</b>                           | 3,241                    |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> | 17,21                    | <b>u</b>                              | 1                        |
| <b>Protection System</b>                     | INOX                     | <b>Material</b>                       | Stainless steel AISI 304 |
| <b>Finish</b>                                | Stainless Steel AISI 304 | <b>Impact Strength (J)</b>            | 20 J                     |
| <b>Resistance Class</b>                      | Class 9C                 | <b>Working temperature range (°C)</b> | -50 / 150 °C             |
| <b>Flange (mm)</b>                           | 120                      | <b>Fire resistance</b>                | A1 No combustible        |
| <b>Width (mm)</b>                            | 300                      |                                       |                          |
| <b>R (mm)</b>                                | 300                      |                                       |                          |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



## Product applications



