
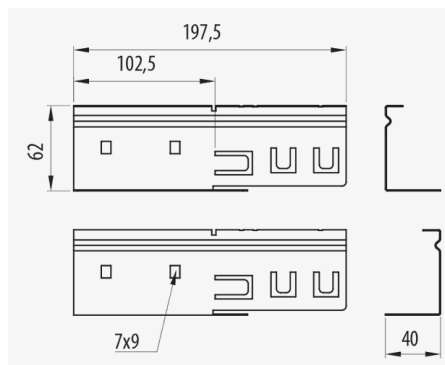


Rejiband Pemsaband Coupler (Ref: 70130200)

1/5

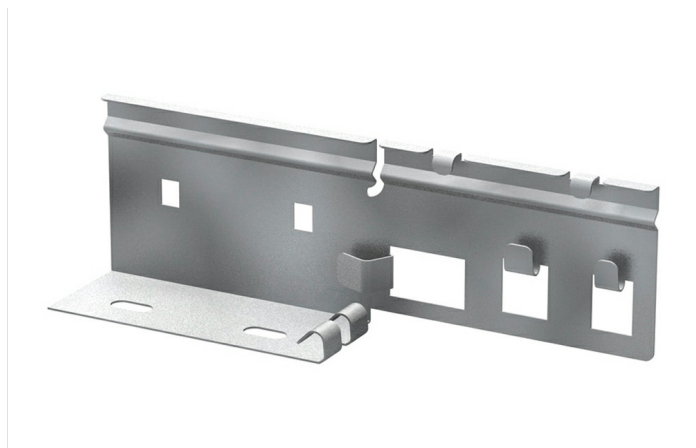

Description

Assembly of different sections of Pemsaband® and Rejiband® trays. With GC protection system. Metal joint pieces, in various Protection Systems, that allow the joining of different sections of Pemsaband® trays and Rejiband® wire mesh tray whilst maintaining the guarantee of electrical continuity, according to IEC 61537. It is mounted on the flange of both trays and is fixed by the Quick-connect Click system on the wire mesh tray and with nuts and bolts in the sheet metal tray.

Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Prevents damage to the cables when making the joint.

It enables the joining of different types of wire mesh and sheet trays.

Electrical continuity guaranteed according to standard IEC61537.

Complete view of the whole installation.

Applications

Used in the management and distribution of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations and in the tertiary sector.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC002413	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,565	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	A1 No combustible
Resistance Class	Class 5		
kg/u	0,218		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester


TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product applications

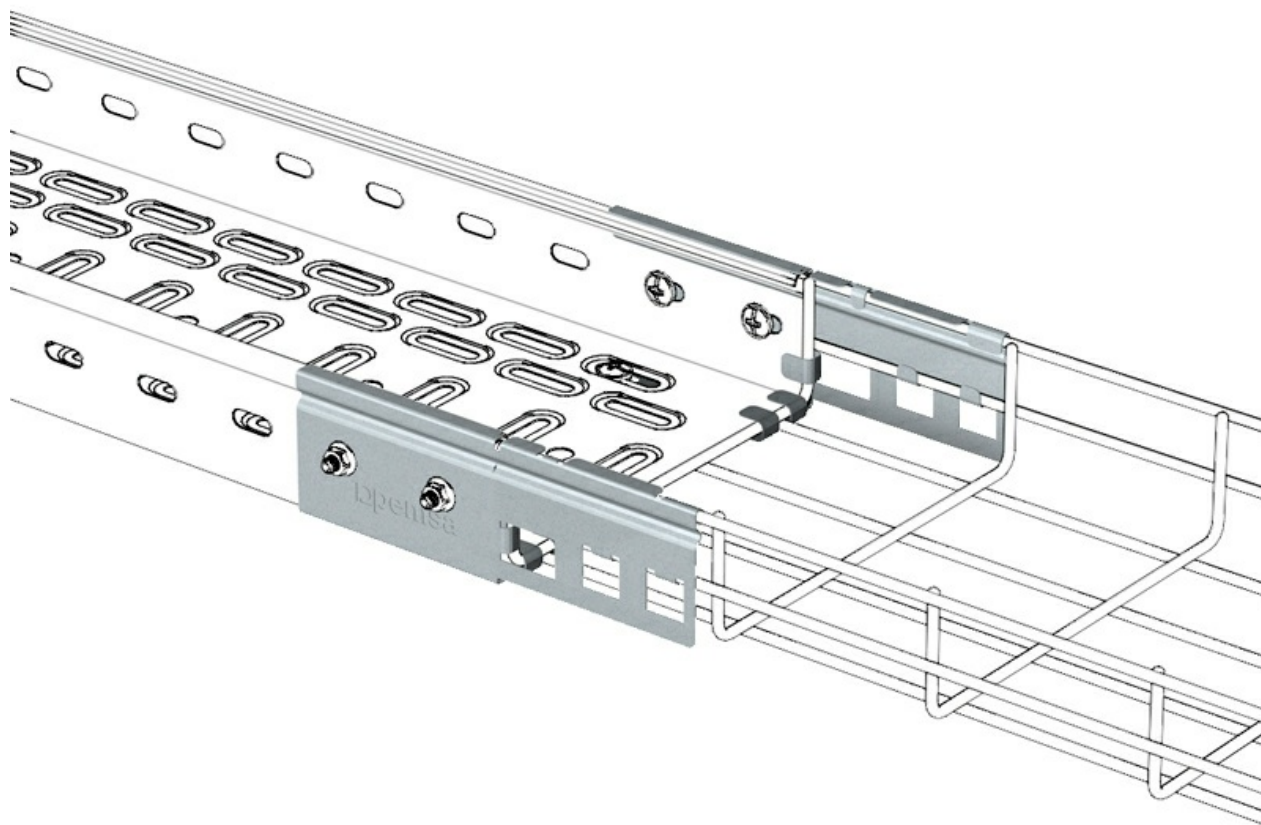

Rejiband Pemsaband Coupler (Ref: 70130200)

