
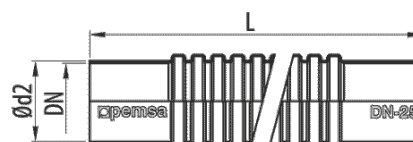


Flexible Bend FRLH (Ref: 55090016)

1/2

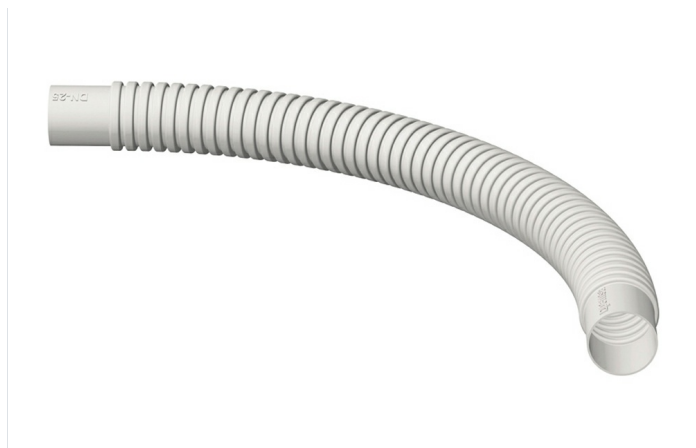

Description

Flexible bend for RLH rigid conduits for the protection of electrical cables in building applications. Manufactured in polypropylene, halogen free with an IP44 protection index. Push fit connection system to the conduit. Available in grey (RAL 7035).

Advantages

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Available in various sizes: NW16, NW20, NW25 and NW32.

Quick assembly via plug-in connection between conduits and fittings.

For connection of RLH rigid and CLH corrugated conduits.

Applications

Suitable for rigid halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Flexible Bend FRLH (Ref: 55090016)

2/2

Product data

ETIM 10	EC000936	u	20
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Polypropylene
Colour	Grey RAL 7035	IP	IP44
DN	NW16	Working temperature range (°C)	-15 / 90 °C
Ø d2 (mm)	17	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
L (mm)	275		
kg/u	0,016		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

