


Conduit Gland Bracket

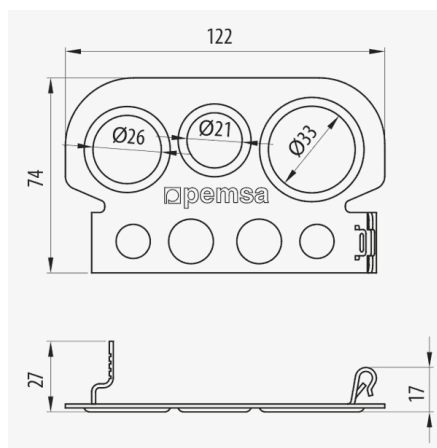

Description

Conduit outlet is a Rejiband® accessory used to protect the wiring output to rigid or flexible conduits. It allows connection of fittings in types PG13, PG16, PG21, M20 and M25. It is installed using the quick-fit Click system without the need of screws and can be placed in the flange or in the base of the tray. Suitable for all sizes of Rejiband® trays and available in various Protection Systems.

Advantages

Fixing by quick mount click system.

Quick installation without the need for screws or fastenings.

Protects the cable outlet.

Can be used with TFA, ECOFLEX, TM-PVC + Pemsa RGp.

It accepts fittings in sizes of: PG13, PG16, PG21, M20 and M25.

Applications

Allows the connection of fittings or glands and allows the output of electrical or telecommunications wiring from rigid or flexible conduits.

Solutions



Main technical characteristics

DN	NW16, NW20, NW25, NW32		10		Steel with surface coating		-50 / 150 °C		A1 No combustible	ETIM 10	EC002410
----	------------------------	---	----	---	----------------------------	---	--------------	---	-------------------	---------	----------

Product data

§	Class 61537	DN	Ref	kg/u
EZ	Class 3	NW16	67010040	0,082
EZ	Class 3	NW20	67010240	0,101
EZ	Class 3	NW25	67010340	0,096
EZ	Class 3	NW32	67010440	0,089
BK8	Class 8	NW16	67080040	0,083
BK8	Class 8	NW20	67080240	0,102
BK8	Class 8	NW25	67080340	0,097
BK8	Class 8	NW32	67080440	0,090

§ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



Conduit Gland Bracket

3/3

Product applications

