
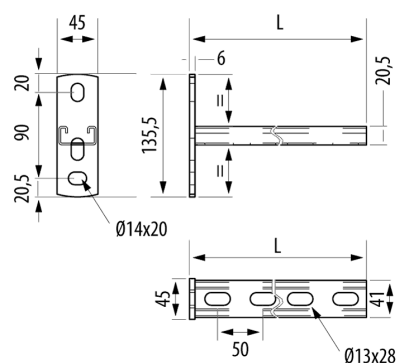


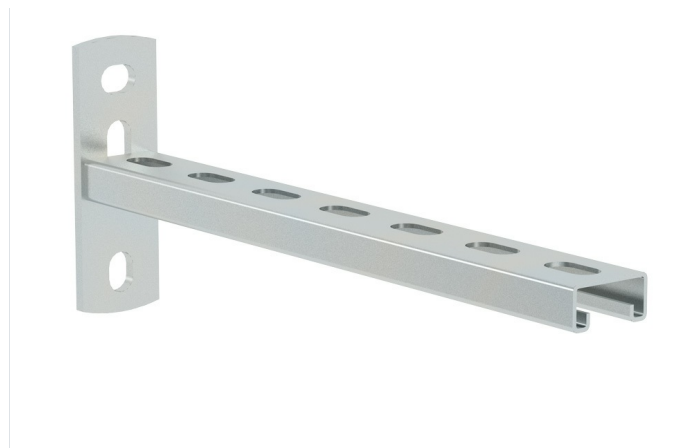

Description

41x21mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 300 mm, With EZ protection system. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

Advantages

Available in PG and GC Protection Systems

Available in widths from 100 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Load values according to international standard IEC 61537.

Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions




Product data			
ETIM 10		EC001003	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		1,9	
Protection System		EZ	
Finish		EZ3, Electrogalvanised	
Resistance Class		Class 3	
Width (mm)		300	
kg/u		0,754	
u		1	
Material		Steel with surface coating	
SWL (kg)		146	
Working temperature range (°C)		-25 / 105 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass


Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic


Load diagrams

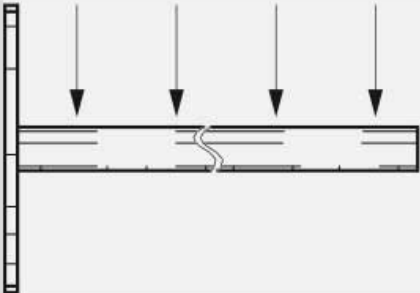
↓ CTA ↓ (kg)		kg
	100	242
	200	196
	300	146
	500	94
	1000	36

Product applications



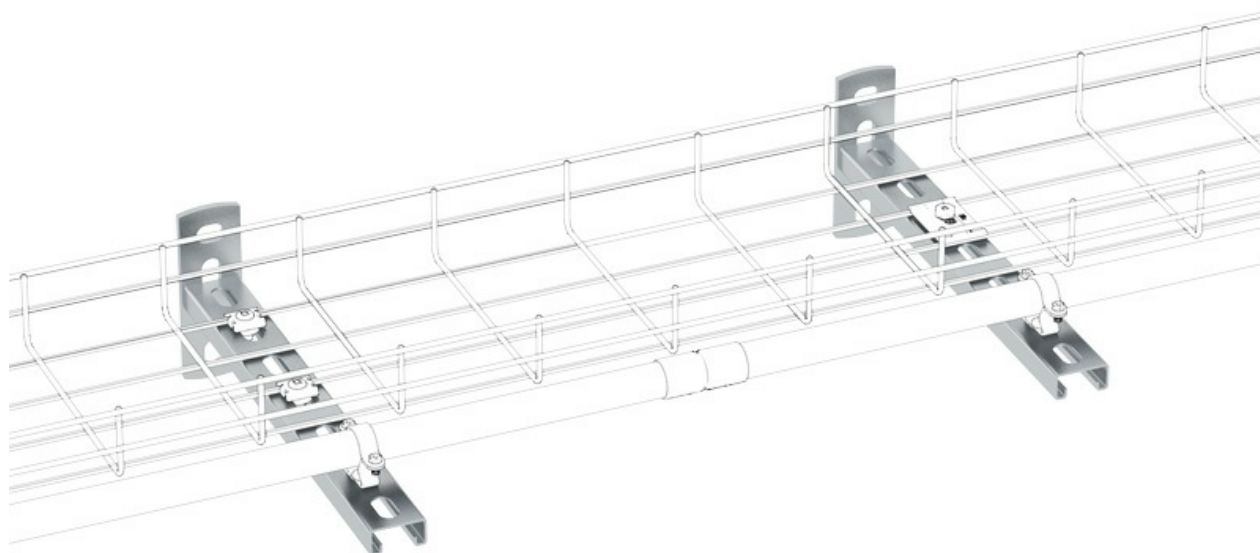

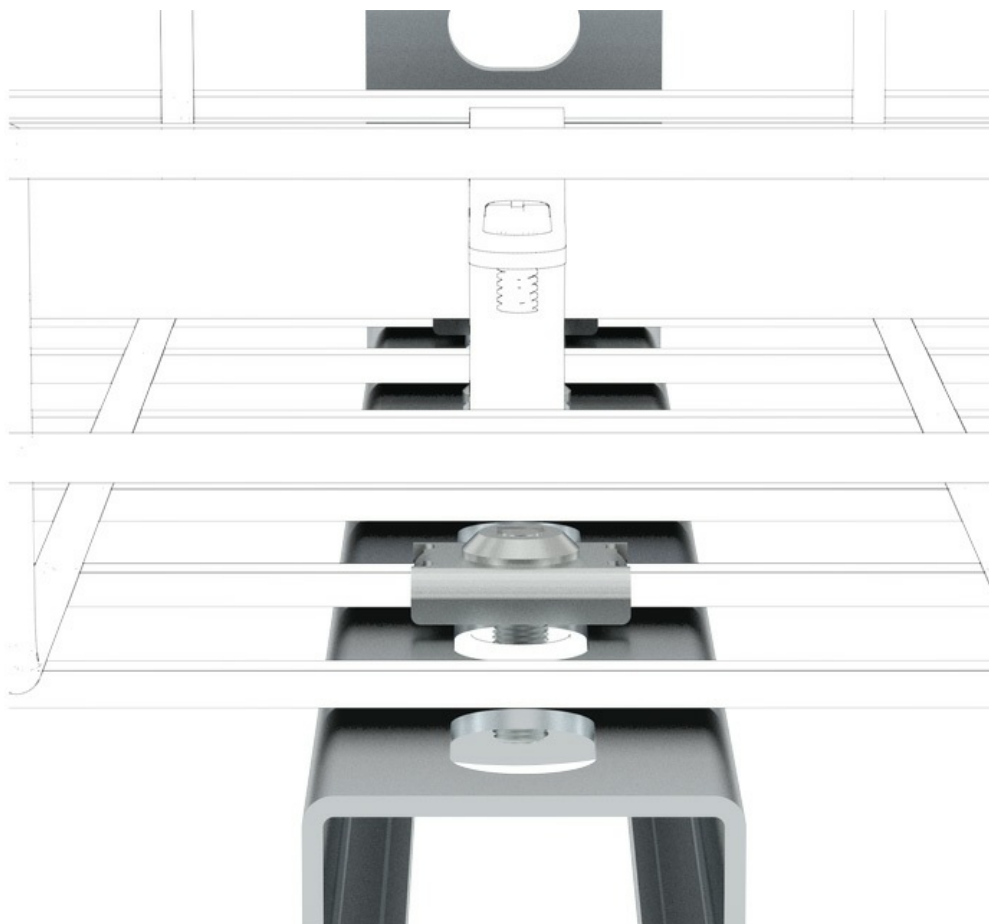

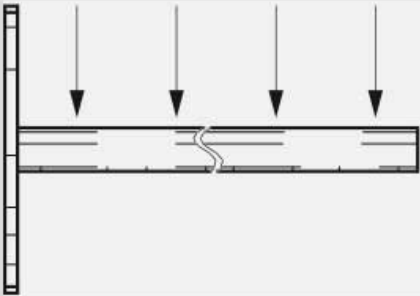↓ CTA ↓ (kg)	↔	kg
	100	242
	200	196
	300	146
	500	94
	1000	36

