


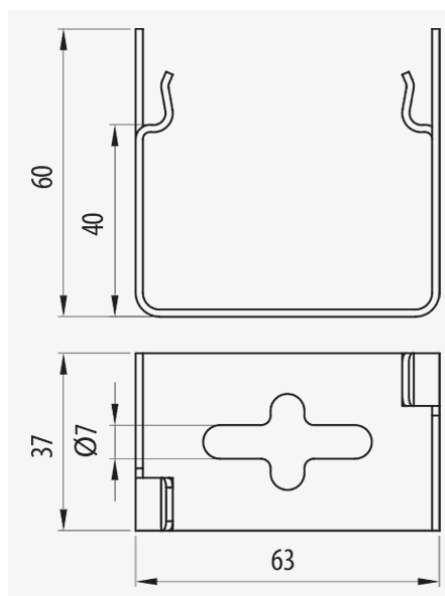

Description

Support in steel used for the ceiling installation of Rejiband® wire mesh tray with a height of 35 and 60 mm and widths of 60, 100 and 150 mm. With GC protection system, ZNI finish. Quick assembly thanks to the Click system of connection without the need of screws. Permissible working load up to 10 kg. Available in various Protection Systems.

Advantages

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

It allows the introduction of cables into the tray from the side.

For wall installation, use the side holes to secure with a M6 or M8 screw or bolt.

For ceiling installation, use M6 or M8 threaded rod connected through the centre of the bracket.

Fast mount system without the need for screws. Folding the fixing clips secures the tray.

Applications

Suitable for wall and ceiling mounting of the Rejiband® 35x60 and 60x60 mm wire mesh tray.

Solutions



Product data			
ETIM 10		EC001003	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		GC	
Finish		Zinc Nickel	
Resistance Class		Class 8	
kg/u		0,069	
u		10	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

