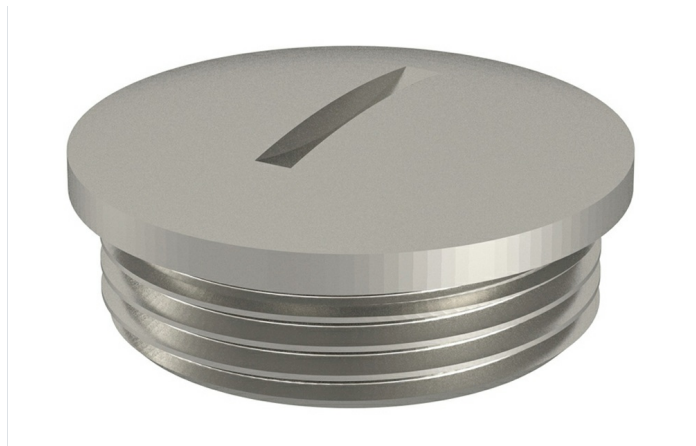


Description

TPM threaded metal plug with an IP68 index with the (not included) O-ring according to EN 60529. Available in metric thread from M12 to M63 and PG7 to PG48. Made of nickel-plated brass.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass.

Protection index EN 60529: IP68 (with O-ring).

Applications

Suitable for the capping of holes in boxes or electrical cabinets ensuring a degree of protection.

Solutions



Product data

ETIM 10	EC000032	kg/u	0,011
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	100
Protection System	LTN	Material	LATÓN NIQUELADO,NBR
Finish	Nickel-plated brass	IP	IP68
M/PG	PG16	Working temperature range (°C)	-25 / 90 °C
G (mm)	6.5	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
Ø d2 (mm)	24		
L (mm)	9.5		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

