


90° RR Bend (Ref: 55014032)

1/2

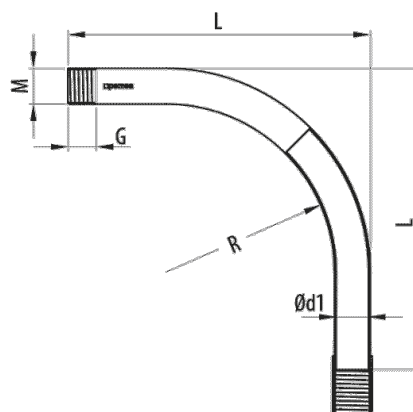

Description

90° threaded bend in EZ Protection System steel for the connection of RR conduits in installations that require high mechanical performance and medium resistance to corrosion. With an IP54 protection index. N mark of Aenor according to IEC 61386 standard. Available in different diameters.

Advantages

CE conformance with the directive 2014/35 and the IEC 61386 standard. N mark of Aenor according to IEC 61386.

Manufactured in PG protection system (standard EN-ISO 2081), suitable for indoor installations. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

Protection index EN 60529: IP54.

Working temperature: -45°C to + 400°C.

Threaded connection for joining RR conduits or accessories. Supplied complete with coupler.

Applications

Suitable for the creation of 90° angles in installations of RR rigid metal threaded conduits in applications of building, tertiary sector and industrial with high requirements of hygiene. Premises of public attendance and premises with risk of fire or explosion.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC000936	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		EZ	
Finish		EZ2, Electrogalvanised	
DN		NW32	
M/PG		M32	
G (mm)		20	
Ø d1 (mm)		29.6	
R (mm)		129	
L (mm)		232	
kg/u		0,499	
u		10	
Material		Steel with surface coating	
Compression strength (N)		4000 N	
Impact Strength (J)		20 J	
IP		IP54	
Working temperature range (°C)		-45 / 400 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic